

Technical Manual



www.emme-italia.com

Via del Molino, 40 – 52010 Corsalone (AR) – Italy – info@emme-italia.com – Tel. +39.0575.511320
P.IVA/ C.F. 11208251006 – R.E.A. AR-159122

19508-52 – Lombardia 18253 : Wheeled Fire Extinguisher, 50 L Foam




- **CYLINDER**
Stainless steel AISI 304, powder painting, Red Ral 3000.
- **EXTINGUISHING AGENT**
Water based foam.
- **PROPELLANT**
Auxiliary pressure.
Fire extinguisher pressurized at moment of use with CO₂.
- **CAP**
2"-F, brass.
- **USE**
A B fire rating
(solid materials, flammable liquids).
- **BRACKET**
Chassis on wheels, welded at the cylinder, red painting Ral 3000.

Note: image is for illustrative purpose only, the product purchased can have some differences

50 L foam wheeled fire extinguisher, pressurized at moment of use, temperature range from +5°C to +60°C, manufactured in accordance to **UNI EN 1866-1**, approved Marine Equipment Directive **MED 2014/90/EU**, certified according to the directive for pressure equipment PED 2014/68/EU. Quality Product certification guaranteed by Bureau Veritas Italia. Suitable for use on fire involving electrical voltages up to 1'000 V, at a distance of 1 meter.

APPROVED\CERTIFIED FIRE EXTINGUISHER:



**FIRE
RATING :**



File name	Type of document	Fire Extinguisher Model	Date	Rel.	Check	Rev.	Pag.
19508-52_Technical Manual	Technical Manual	19508-52	28/05/2025	S.R		3	1/3

REPRODUCTION IS PROHIBITED

19508-52 – Lombardia 18253 : Wheeled Fire Extinguisher, 50 L Foam

• INSTALLATION

The installation must be carried out in accordance with the provisions in force in the country where the device is used.

• USE

The commissioning and maintenance activities for maintaining efficiency must be carried

• MAINTENANCE

out in accordance with the document **CSA_1_ENG** by qualified technical personnel and in compliance with the regulations in force in the country of use.

Any tampering or intervention carried out by unqualified personnel will void the product warranty.

It is recommended to place the device in a dry place protected from atmospheric agents.

TECHNICAL SPECIFICATIONS


FIRE RATING	A IV B
EXTINGUISHING AGENT	Emme Waterfoam (2 % SC-6 orchidee + 98 % Water) (* Hyper-filtered water with an osmosis process)
PROPELLANT	2 Kg CO ₂
TEMPERATURE RANGE	+5°C / +60°C
NOMINAL CHARGE	50 Liters
FULL WEIGHT	~ 83 Kg
DIMENSIONS	Height 1100 +/- 10 mm ; Width 490 +/- 10 mm Depth 560 +/- 15 mm
DISCHARGE TIME	~ 42,6 seconds
CYLINDER PRESSURE TEST	PT 30 bar
CYLINDER VOLUME	62 L
SAFETY DEVICE	Set between 21 and 26 bar
CYLINDER MATERIAL	Stainless steel AISI 304
TREATMENT	Outside: Sandblast and powder painting Ral 3000

PACKAGING

(Note: the packaging quantities and measurements are indicative and can be subject at change)

STANDARD

Maximum nr. 4 pieces for pallet
Pallet dimensions 100x120x135(h) cm

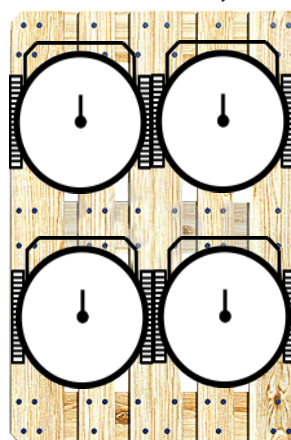


TRANSPORT DISPOSAL

Land transport : Exemption for the purposes of ADR disposal 594

Ship Transport : IMDG Code – UN 1044 class 2.2 Fire Extinguishers

File name	Type of document	Fire Extinguisher Model	Date	Rele.	Check	Rev.	Pag.
19508-52_Technical Manual	Technical Manual	19508-52	28/05/2025	S.R		3	2/3

COMPONENTS AND SPARE PARTS LIST

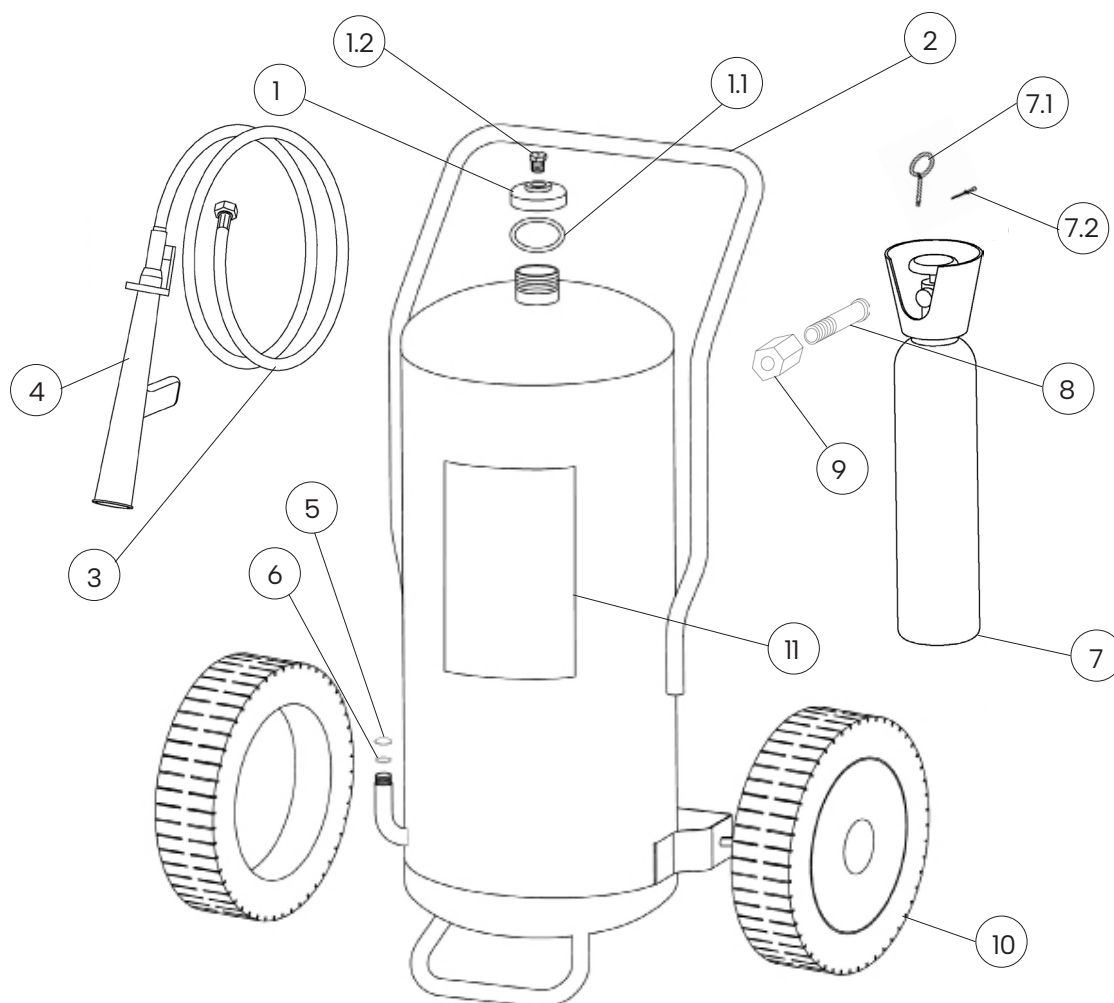

NUM.	DESCRIPTION	CODE
1	2" brass cap	18463
1.1	O-ring cap	n.a.
1.2	Safety device	n.a.
2	Cylinder	18307
3	Hose	18421-3
4	Dispensing lance (complete of ball valve with control lever and inox filter for foaming)	2181-2
5	Membrane	0262-4
6	Copper washer	2148-11

NUM.	DESCRIPTION	CODE
7	Complete pressurization cylinder, with 2 Kg CO2	18518
7.1	Safety pin	0282-1
7.2	Safety pin seal	0285
8	Fitting for cylinder with nitrogen cylinder	18489
9	Fitting for nitrogen cylinder with cylinder	18495
10	Wheel + stop wheel (diam. 300mm)	0124V
11	Label	18373
	Additive for refill (1 Lt. concentrate) (To mix with water, for one refill)	1470-1

The spare part at number 1, includes already others components 1.1 and 1.2
The spare part at number 7, includes already others components 7.1 and 7.2
"n.a." mean that the component is not available as single spare part.

REPRODUCTION IS PROHIBITED

File name	Type of document	Fire Extinguisher Model	Date	Rele.	Check	Rev.	Pag.
19508-52_Technical Manual	Technical Manual	19508-52	28/05/2025	S.R		3	3/3